
IPA-1



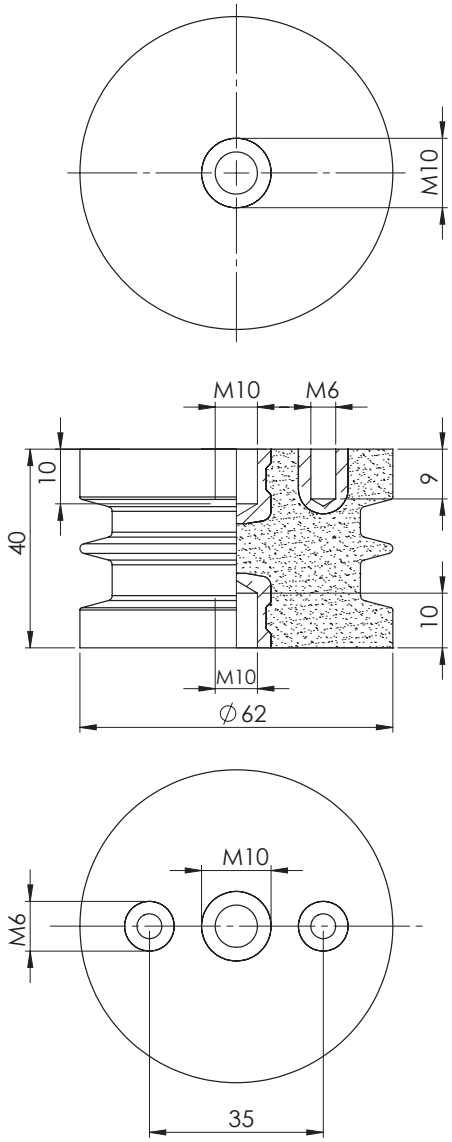

Low-voltage support insulators **IPA-1**

TECHNICAL DATA	IPA-1
Rated voltage (kV)	0,72
Highest voltage for equipment (eff.) (kV)	1
Breaking force (kN)	3,75
Colour	Brown
Standard	IEC 60273:1990; IEC 60660:1999
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of main insulation	Epoxy resin
Mass (kg)	0,2

NOTE:

These epoxy resin post insulators can be used for all indoor applications.
They have a cylindrical shape which provides high structural robustness, completed with an appropriate creepage distance and number of ribs.

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com