
IPC-1; IPC-1s



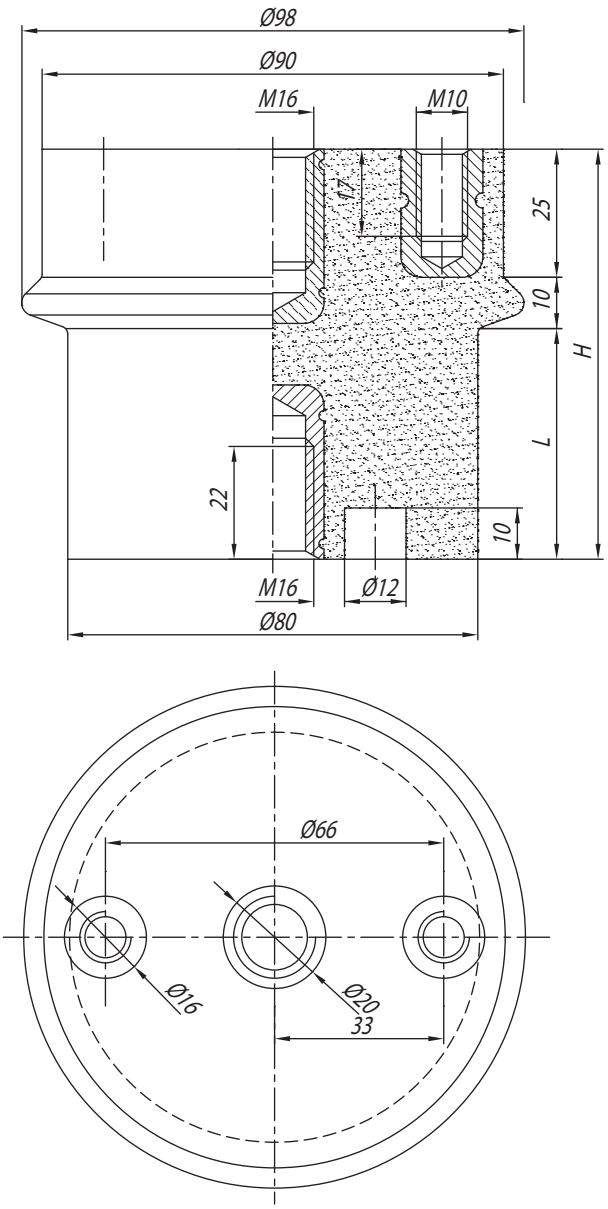

IPC-1

Low-voltage support insulators for indoor mounting **IPC-1, IPC-1s**

TECHNICAL DATA	IPC-1s	IPC-1
Rated voltage (kV)	0,72	1
Highest voltage for equipment (eff.) (kV)	0,8	1,2
Rated power-frequency withstand voltage, 1 min (r.m.s.) (kV)	6	6
Mass (kg)	0,53	0,67
Breaking force (kN)	12,5	
Valid standard	IEC 60664-1	
Mounting	Indoor	
Temperature endurance	- 40°C up to +125°C	
Type of main insulation	Epoxy resin	

Insulator type	Dimensions (mm)	
	H	L
IPC-1	80	45
IPC-1s	65	30

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com