

OK/D 21*



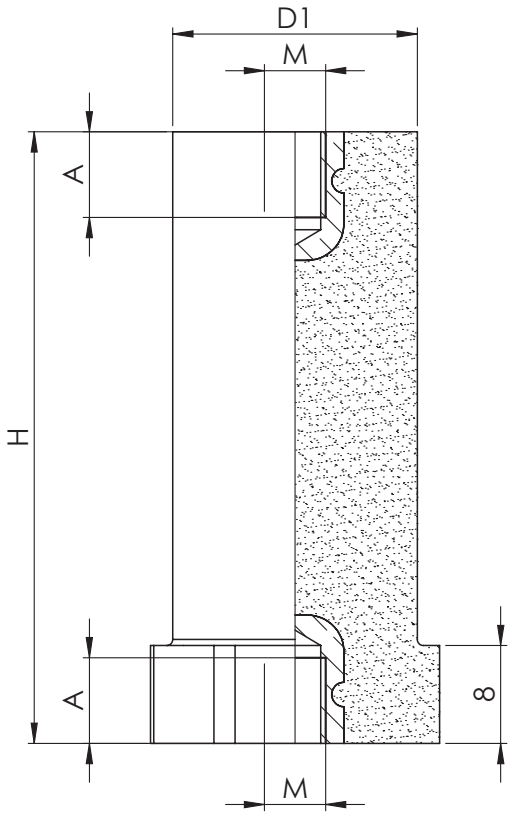

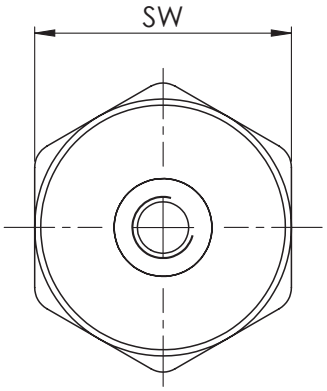

Low-voltage support insulators **OK/D 21***

Type	Dimensions (mm)							Package (pcs.)
	H	SW	D1	Um (V)	M	A	F (kN)	
OK/D 2116 – M4	16	21	20	220	M4	4	3	200
OK/D 2116 – M5	16	21	20	220	M5	4	3	200
OK/D 2116 – M6	16	21	20	220	M6	4	3	100
OK/D 2116 – M8	16	21	20	220	M8	4	3	150
OK/D 2120 – M5	20	21	20	400	M5	5	2.5	200
OK/D 2120 – M6	20	21	20	400	M6	5	2.5	100
OK/D 2120 – M8	20	21	20	400	M8	5	2.5	200
OK/D 2125 – M5	25	21	20	500	M5	6	2	150
OK/D 2125 – M6	25	21	20	500	M6	6	2	150
OK/D 2125 – M8	25	21	20	500	M8	6	2	150
OK/D 2130 – M5	30	21	20	600	M5	7	2	140
OK/D 2130 – M6	30	21	20	600	M6	7	2	140
OK/D 2130 – M8	30	21	20	600	M8	7	2	140
OK/D 2135 – M6	35	21	20	600	M6	7	1.5	120
OK/D 2140 – M6	40	21	20	600	M6	9	1.5	110
OK/D 2140 – M8	40	21	20	600	M8	10	1.5	110
OK/D 2145 – M6	45	21	20	750	M6	9	1	100
OK/D 2145 – M8	45	21	20	750	M8	10	1	100
OK/D 2150 – M6	50	21	20	750	M6	10	1	80
OK/D 2150 – M8	50	21	20	750	M8	10	1	80
OK/D 2160 – M6	60	21	20	750	M6	9	1	70
OK/D 2160 – M8	60	21	20	750	M8	9	1	70

TECHNICAL DATA	OK/D 21*
Colour	Brown
Standard	IEC 60273:1990; IEC 60660:1999
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of main insulation	Epoxy resin

NOTE:

Insulators of type OK/D 21* exhibit excellent electrical and mechanical characteristics and can be used in extreme operating conditions such as high ambient temperatures, as well as when in contact with corrosive substances and vibrations. The hexagon in the middle is designed for a wrench to facilitate easy mounting and fixing of the insulator. Type OK/D 21* insulators are made of epoxy resin, which contributes to environmental protection and human health compared to similar materials such as polyglass-polyester with fiberglass.

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com