

OK/D 30*



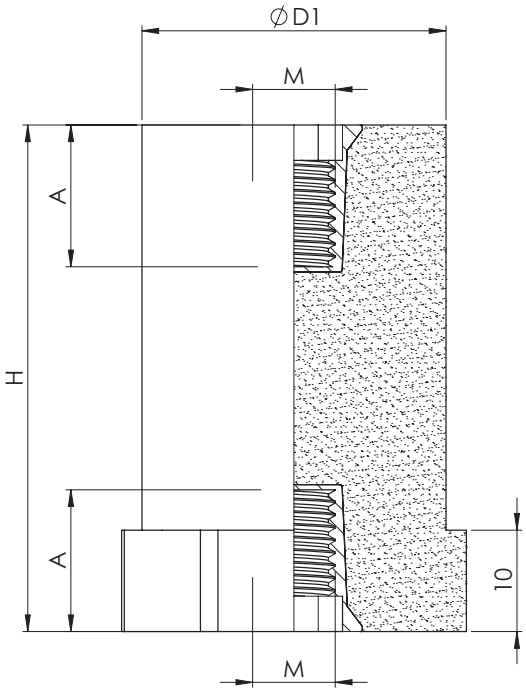

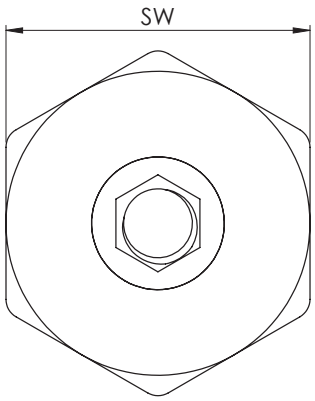

Low-voltage support insulators **OK/D 30***

Type	Dimensions (mm)							Package (pcs.)
	H	SW	D1	Um (V)	M	A	F (kN)	
OK/D 3030 – M6	30	30	30	750	M6	9	4.5	80
OK/D 3030 – M8	30	30	30	750	M8	9	4.5	80
OK/D 3030 – M10	30	30	30	750	M10	9	4.5	80
OK/D 3035 – M6	35	30	30	1000	M6	9	4.5	64
OK/D 3035 – M8	35	30	30	1000	M8	9	4.5	64
OK/D 3035 – M10	35	30	30	1000	M10	9	4.5	64
OK/D 3040 – M6	40	30	30	1000	M6	12	3	60
OK/D 3040 – M8	40	30	30	1000	M8	12	3	60
OK/D 3040 – M10	40	30	30	1000	M10	12	3	60
OK/D 3045 – M6	45	30	30	1000	M6	12	2.5	48
OK/D 3045 – M8	45	30	30	1000	M8	12	2.5	48
OK/D 3045 – M10	45	30	30	1000	M10	13	2.5	48
OK/D 3050 – M6	50	30	30	1500	M6	12	2	48
OK/D 3050 – M8	50	30	30	1500	M8	13	2	48
OK/D 3050 – M10	50	30	30	1500	M10	12	2	48
OK/D 3055 – M6	55	30	30	1500	M6	12	1.5	40
OK/D 3055 – M8	55	30	30	1500	M8	11	1.5	40
OK/D 3060 – M6	60	30	30	1500	M6	12	1.5	40
OK/D 3060 – M8	60	30	30	1500	M8	16	1.5	40
OK/D 3060 – M10	60	30	30	1500	M10	20	1.5	40
OK/D 3065 – M8	65	30	30	1500	M8	18	1	32
OK/D 3070 – M6	70	30	30	1500	M6	14	1	32
OK/D 3070 – M8	70	30	30	1500	M8	18	1	32
OK/D 3070 – M10	70	30	30	1500	M10	18	1	32

TECHNICAL DATA	OK/D 30*
Colour	Brown
Standard	IEC 60273:1990; IEC 60660:1999
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of main insulation	Epoxy resin

NOTE:
Insulators of type OK/D 30* exhibit excellent electrical and mechanical characteristics and can be used in extreme operating conditions such as high ambient temperatures, as well as when in contact with corrosive substances and vibrations. The hexagon in the middle is designed for a wrench to facilitate easy mounting and fixing of the insulator. Type OK/D 30* insulators are made of epoxy resin, which contributes to environmental protection and human health compared to similar materials such as polyglass-polyester with fiberglass.

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com