

OK/D 60*



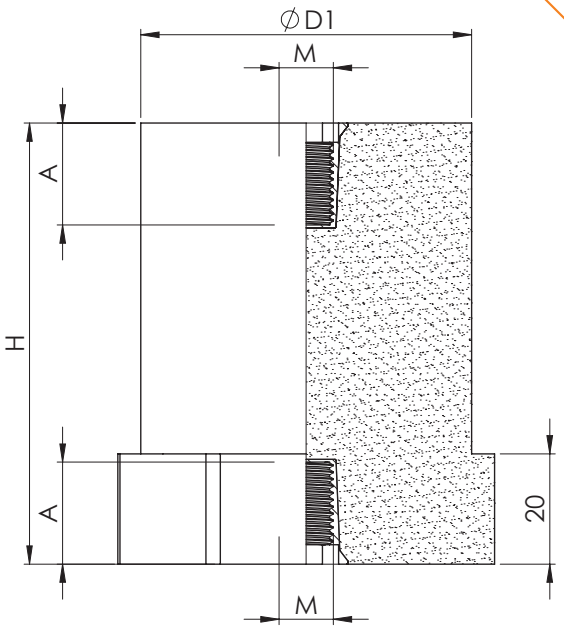

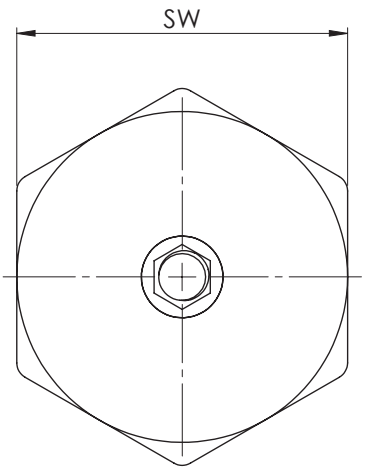

Low-voltage support insulators **OK/D 60***

Type	Dimensions (mm)					Um (V)	F (kN)	Package (pcs.)
	H	SW	D1	A	M			
OK/D 6040 – M10	40	60	60	11	M10	1500	7	12
OK/D 6040 – M12	40	60	60	11	M12	1500	7	12
OK/D 6040 – M16	40	60	60	12	M16	1500	7	12
OK/D 6060 – M10	60	60	60	18	M10	3000	5	10
OK/D 6060 – M12	60	60	60	18	M12	3000	5	10
OK/D 6060 – M16	60	60	60	19	M16	3000	5	10
OK/D 6080 – M10	80	60	60	19	M10	5000	9	8
OK/D 6080 – M12	80	60	60	19	M12	5000	9	8
OK/D 6080 – M16	80	60	60	23	M16	5000	9	8
OK/D 60100 – M10	100	60	60	19	M10	8000	15	5
OK/D 60100 – M12	100	60	60	19	M12	8000	15	5
OK/D 60100 – M16	100	60	60	23	M16	8000	15	5

TECHNICAL DATA	OK/D 60*
Colour	Brown
Standard	IEC 60273:1990; IEC 60660:1999
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of main insulation	Epoxy resin

NOTE:
Insulators of type OK/D 60* exhibit excellent electrical and mechanical characteristics and can be used in extreme operating conditions such as high ambient temperatures, as well as when in contact with corrosive substances and vibrations. The hexagon in the middle is designed for a wrench to facilitate easy mounting and fixing of the insulator. Type OK/D 60* insulators are made of epoxy resin, which contributes to environmental protection and human health compared to similar materials such as polyglass-polyester with fiberglass.

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com