
IPAS-7.2, IPAS-24



IPAS-7,2

Support insulators for outdoor mounting **IPAS-7,2**, **IPAS-24**

TECHNICAL DATA	IPAS-7,2	IPAS-24
Rated voltage (kV)	6	15 ; 20
Highest voltage for equipment (eff.) (kV)	7,2	17,5 ; 24
Rated power-frequency withstand voltage, 1 min (r.m.s.) (kV)	20	38 ; 50
Rated impulse withstand voltage 1,2/50 μs (kV)	60	95 ; 125
Mass (kg)	0,55	2,0
Breaking force (kN)	3,75	12,5
Number of ribs	3	6
Creepage distance (mm)	230	617
Valid standard	IEC 60660, IEC 60060-1	
Mounting	Outdoor	
Operation temperature	- 40°C up to +125°C	
Type of main insulation	Epoxy resin	

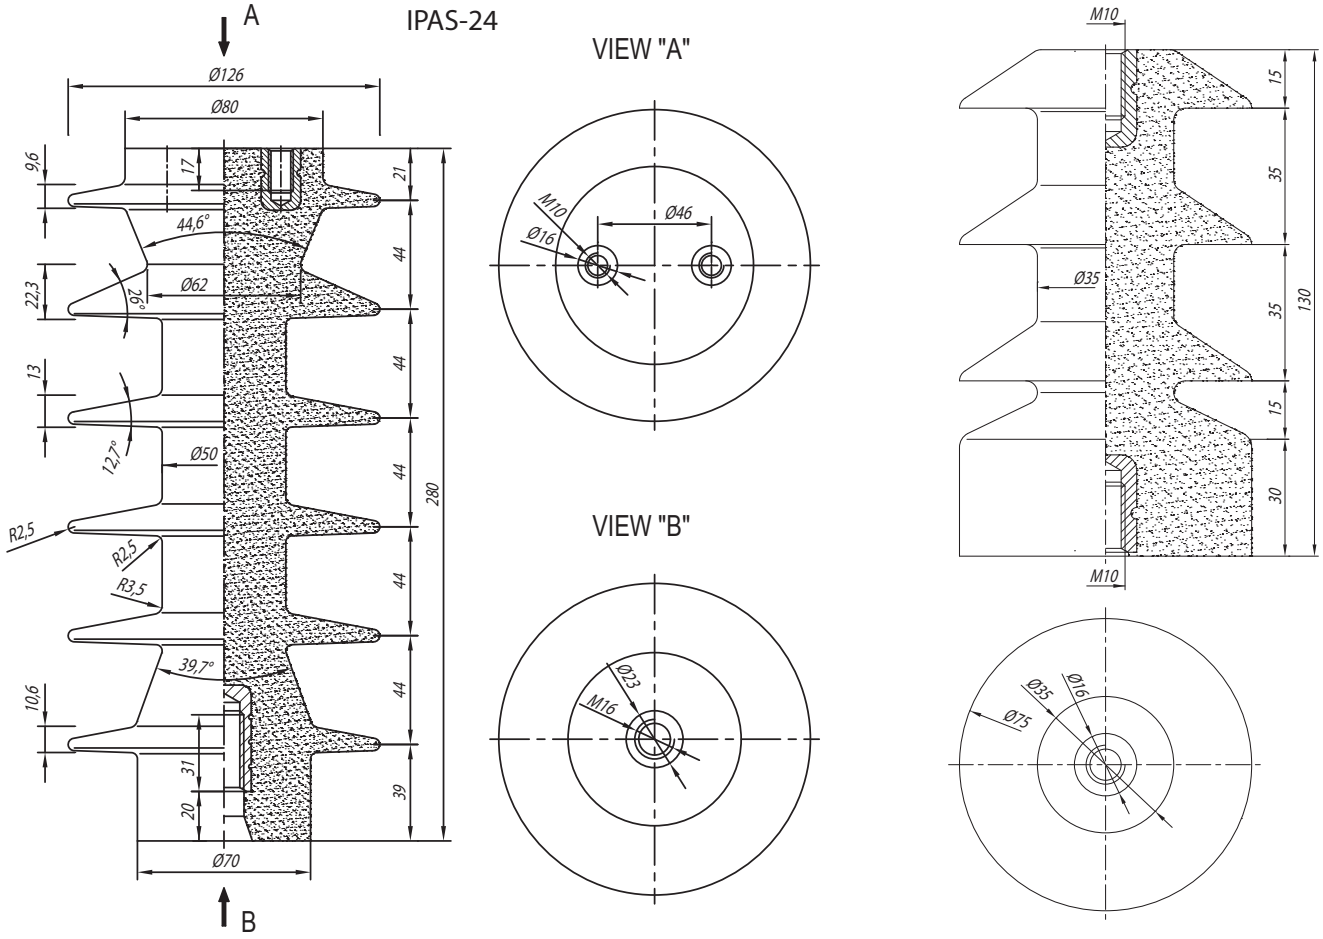

NOTE:

These epoxy resin post insulators can be used for all outdoor applications. These insulators feature a cylindrical shape which provides high structural robustness, completed with an appropriate creepage distance and number of ribs.

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com