
BI 12/24-250A



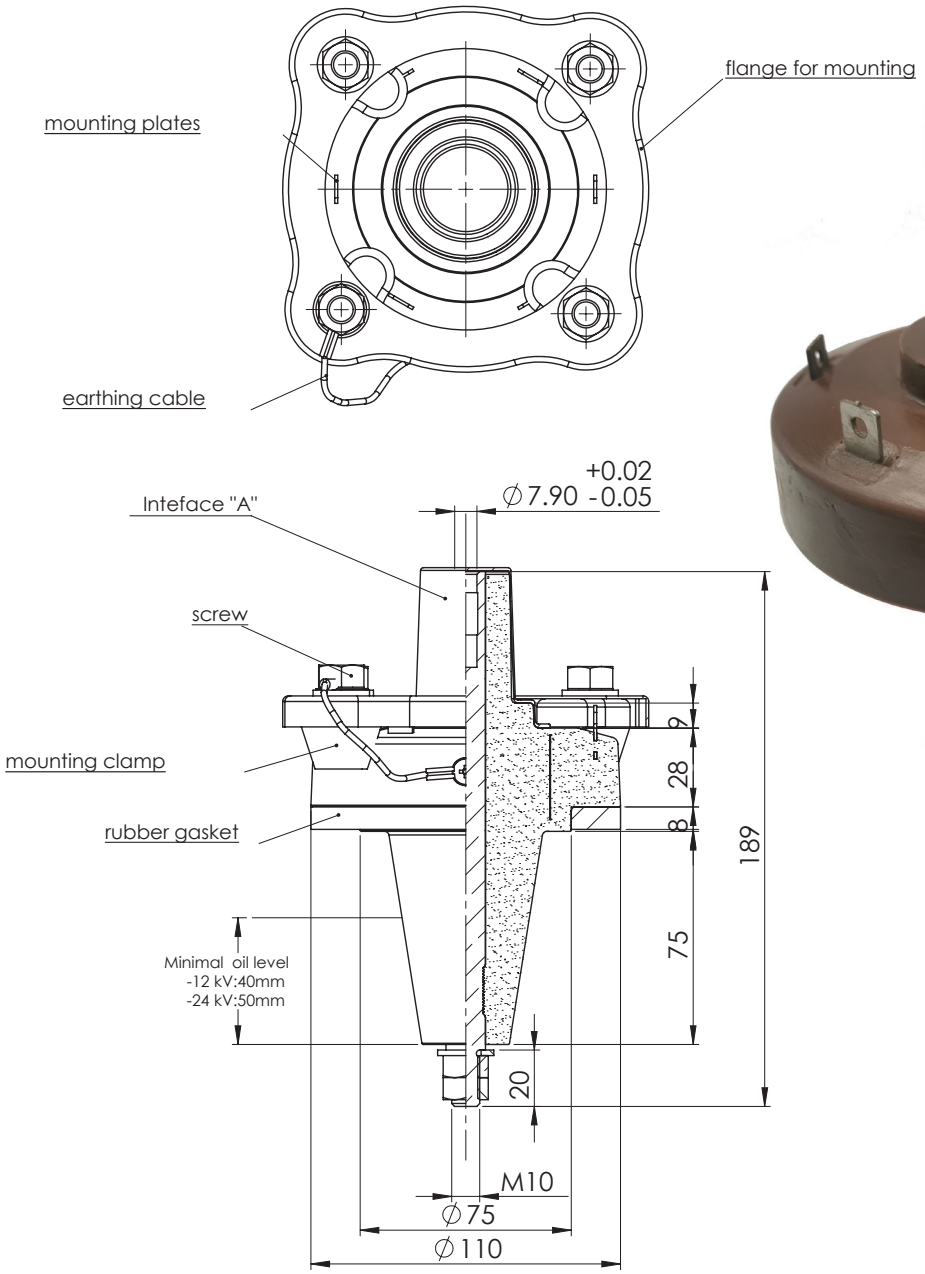

Medium-voltage bushing insulator **BI 12/24-250A**

TECHNICAL DATA	BI 12/24-250A
Rated voltage (kV)	10/11/15/20/22
Highest voltage for equipment (eff.) (kV)	12/17.5/24
Rated current (A)	250
Colour	Brown
Standard	IEC 60137:2017
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of basic insulation	Epoxy resin
Mass (kg)	1,9

NOTE:

For use in equipment insulated with oil fluid, typically for transformers, switchgears, capacitors...

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com