
BI 20/55



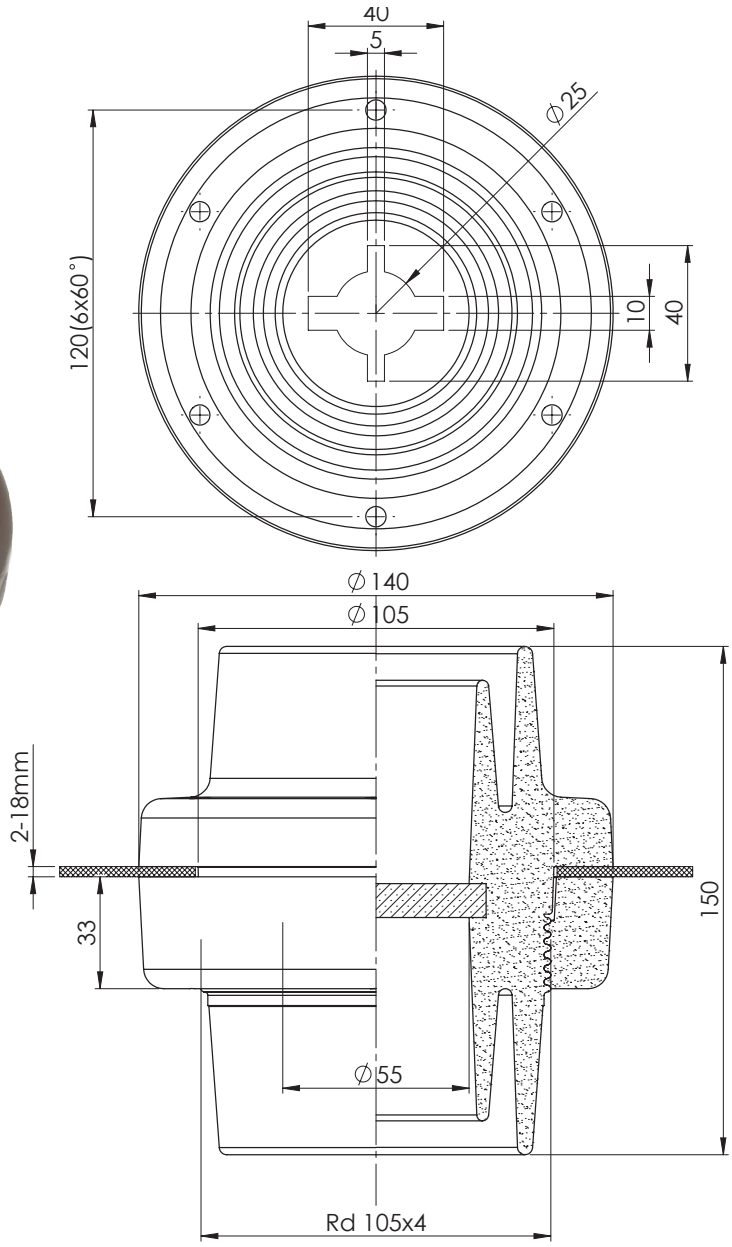

Through-wall bushing insulator **BI 20/55**

TECHNICAL DATA	BI 20/55
Rated voltage (kV)	20
Highest voltage for equipment (eff.) (kV)	24
Busbar dimensions (mm)	40x10; 40x5; Ø25
Colour	Brown
Standard	IEC 60173:2017
Mounting	Indoor
Operation temperature (°C)	-40°C up to +125°C
Type of main insulation	Epoxy resin
Mass (kg)	1,5

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com