



PPR-3, PPR-4

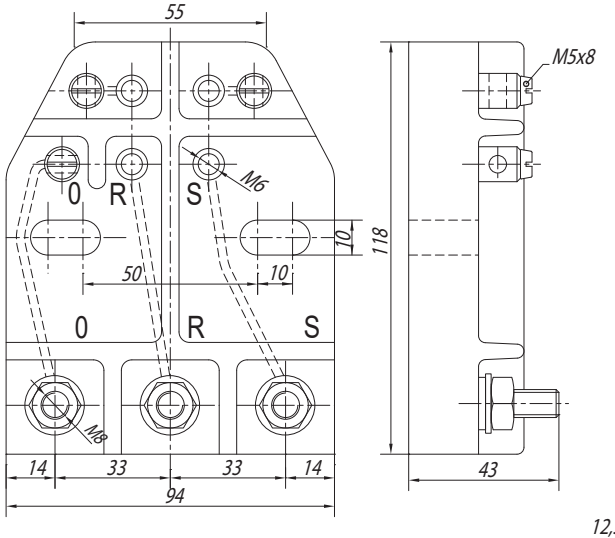

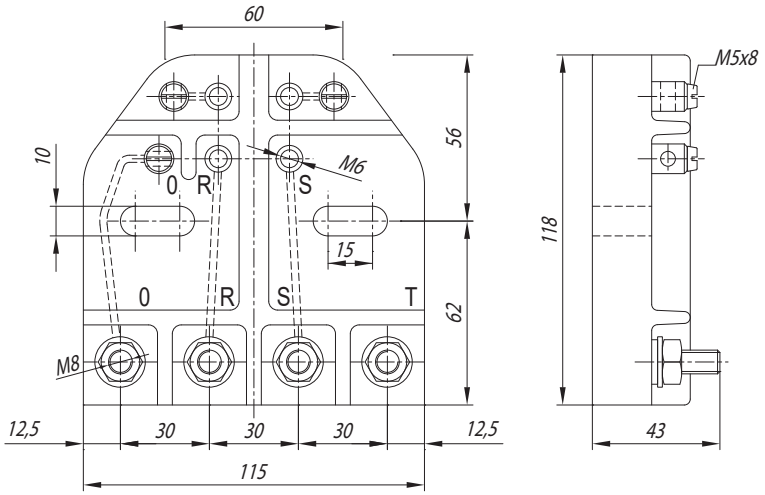

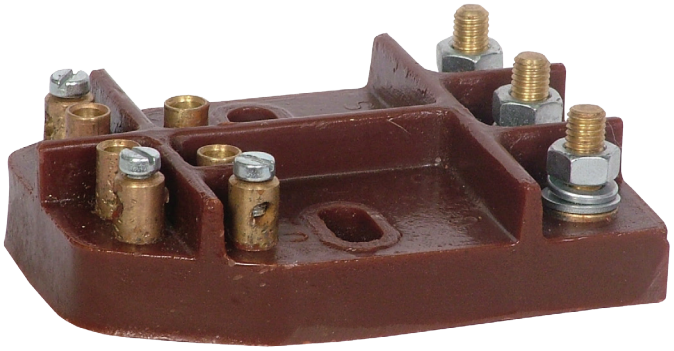

PPR-3

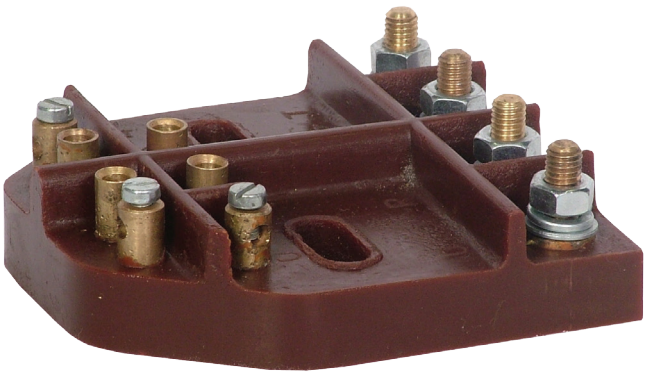

PPR-4

Terminal plates for street lighting **PPR-3, PPR-4**

TECHNICAL DATA	PPR-3	PPR-4
Rated voltage (kV)	0,72	0,72
Highest voltage for equipment (eff.) (kV)	0,8	0,8
Rated power-frequency withstand voltage, 1 min. (kV)	3	3
Mass (kg)	0,60	0,76
Number of terminals	3 (2 phases + neutral)	4 (3 phases + neutral)
Valid Standard	IEC 60664-1	
Rated fuse current (A)	Max.16	
Number of fuses per bulb	2	
Mounting	In the public lighting poles	
Frequency (Hz)	50/60	
Operation temperature	- 40°C up to +125°C	
Type of main insulation	Epoxy resin	

FMT - Factory of measuring transformers d.o.o.
Zajecar 19000, Strazilovska 57, Serbia

Central phones: +381 19 3413 122; +381 19 3413 222; +381 19 3413 111
General manager: +381 19 31 5555 1
Sales: +381 19 31 5555 5; +381 19 31 5555 6;
+381 19 31 5555 8; +381 19 3413 111
komercijala@fmt.rs
Supply: +381 19 31 5555 7
Development: +381 19 31 5555 3
Finance: +381 19 31 5555 2
www.fmt.rs • office@fmt.rs

1969

ZAJEČAR

FMT

MINEL FEPO d.o.o.
Zeleznicka 3
23101 Zrenjanin, Serbia
tel: +381 23 544 902
tel: +381 23 545 529
office@minelfepo.com